

## Properties

### Description

Italian patent leather  
Available in 4 colors

### Hide Size

20.00 sq. ft. avg.

### Thickness

1.2mm +/- 0.1mm

### Weight

3.0 oz +/- 0.25 oz per sq. ft.

### Grain Characteristics

Smooth

### Finish Characteristics

High gloss

## Test Performance

### AATCC Method 16, Option E Light Fastness

Class 2 (72 hours)

### ASTM D-2097 Newark Flex

70,000 cycles  
no cracking

### ASTM D-2208 Breaking Force

200 lbs.

### ASTM D-2211 Elongation

30%–80% at 36 lbs.

### ASTM D7255 Taber Abrasion

1000+ cycles (CS10)  
No damage through the finish

### ASTM D-4705 Stitch Tear

23 lbs.

### ASTM D-5053 Crock Fastness

Class 5 (dry rub)  
Class 5 (wet rub)

## Flame Resistance

California TB 117

NFPA-260 Cigarette Ignition  
Class I

IMO A.652 (16) 8.2


## Average Cutting Area

Average Useable Area

62"l x 22"w

Average Half Hide Size

20 sq. ft.

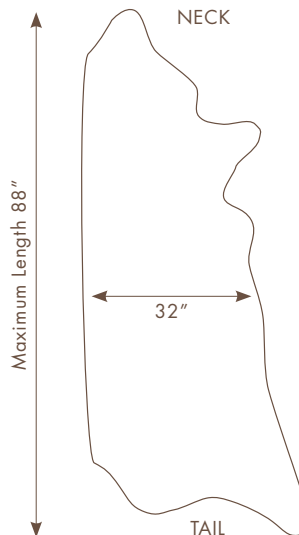

### Showrooms

Atlanta  
Boston  
Charlotte  
Chicago  
Cincinnati  
Dallas  
Dania Beach  
Honolulu  
Houston  
Laguna Niguel  
Los Angeles  
New York  
Philadelphia  
Raleigh  
San Diego  
San Francisco  
Scottsdale  
Troy  
Washington, DC

### International

Australia  
Belgium  
Canada  
Chile  
England  
France  
Greece  
Hong Kong  
New Zealand  
Portugal  
Spain  
Switzerland  
United Arab Emirates



1360 Niagara Street  
Buffalo, New York 14213  
800.342.7738 / 716.882.9301  
Fax 716.882.9358

www.garrettleather.com