

Properties

Description

Italian patent leather
Available in 14 colors

Hide Size

20.00 sq. ft. avg.

Thickness

1.1mm +/- 0.1mm

Weight

3.0 oz +/- 0.25 oz per sq. ft.

Grain Characteristics

Alligator impress pattern

Finish Characteristics

High gloss

Test Performance

AATCC Method 16, Option E Light Fastness

Class 4-5 (72 hours)

ASTM D-2097 Newark Flex

70,000 cycles
no cracking

ASTM D-2208 Breaking Force

161 lbs.

ASTM D-2211 Elongation

30%-80% at 62 lbs.

ASTM D7255 Taber Abrasion

1000+ cycles (CS10)
No damage through the finish

ASTM D-4705 Stitch Tear

27 lbs.

ASTM D-5053 Crock Fastness

Class 4.5 (dry rub)
Class 4.5 (wet rub)


Flame Resistance

California TB 117

NFPA-260 Cigarette Ignition
Class I

IMO A.652 (16) 8.2

Pattern Repeat (vertical x horizontal) - Pattern images not to scale; to show direction only.

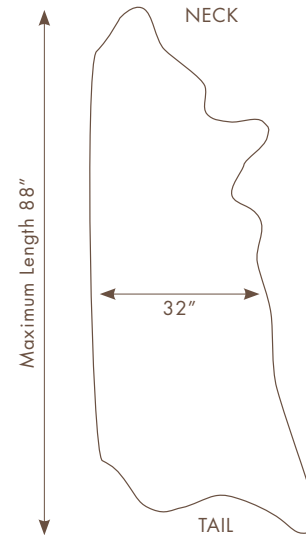

Average Cutting Area

Average Useable Area
62"l x 22"w

Average Half Hide Size
20 sq. ft.

Showrooms

Atlanta
Boston
Charlotte
Chicago
Cincinnati
Dallas
Dania Beach
Honolulu
Houston
Laguna Niguel
Los Angeles
New York
Philadelphia
Raleigh
San Diego
San Francisco
Scottsdale
Troy
Washington, DC

International

Australia
Belgium
Canada
Chile
England
France
Greece
Hong Kong
New Zealand
Portugal
Spain
Switzerland
United Arab Emirates



1360 Niagara Street
Buffalo, New York 14213
800.342.7738 / 716.882.9301
Fax 716.882.9358

www.garrettleather.com