


## Alpine Tile and Pitched Panel Installation Instructions



## Alpine Tiles

Locate bottom, pre-wrapped mounting boards and install from left to right on the wall using customer provided screws suitable for the wall that you are installing the mounting boards onto. Countersunk screw holes are provided, but screws may be fastened through the mounting boards at any point in order to fasten to a stud.

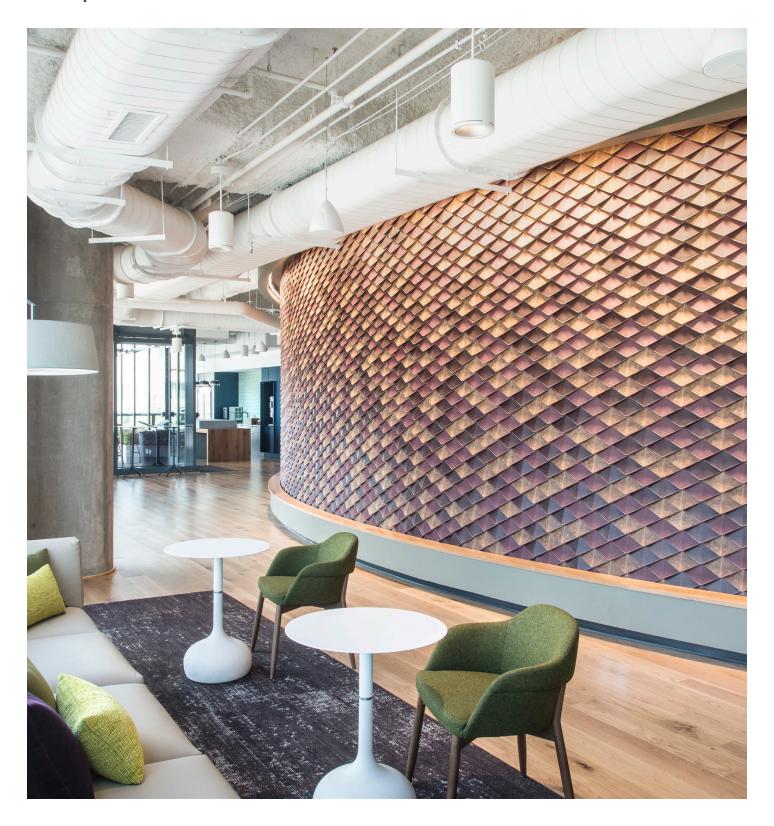

Select the main tile required for the position above the bottom left tile. Using the mounting pegs, place this tile into position on the mounting boards and insert the two left pegs only, leaving the holes on the right of this tile open.




Repeat this process for the entire wall. Remember to always work left to right and bottom to top. Use painted mounting pegs for the top row.

## **Drilled Board Installation**



Once the bottom row is complete, continue adding main mounting boards above, ensuring all boards are aligned.



Select the next main tile. Place this tile into position, ensuring that the holes on the left of this tile align with the open holes on the tile to the immediate left and use the mounting pegs to attach these together.

## Pitch Panels Rail Installation



Fix bottom left or right rail onto wall, starting with the top screw hole.



Fix next rail into position by carefully using a pitched panel as a guide for distance. Again, ensure rails are level and fix into wall. For the first and last rails, ensure panels slide into the outer slots so that slots are not visible when fully assembled.



Take care that when joining rails vertically, that the distance between the top and bottom slots of new rails are equal to that of all slots on the rails.



Ensure rail is level and continue fixing.



Insert panel hooks into rail slots then push down to slide into place. Always ensure that panels are installed starting at the bottom and working up.



Repeat this process for the entire wall. Remember to always work left to right and bottom to top.